


Three Phase String Inverter

SUN- 18 / 20 / 25 K-G05-AU



2 MPPT trackers, Max. efficiency up to 98.6%

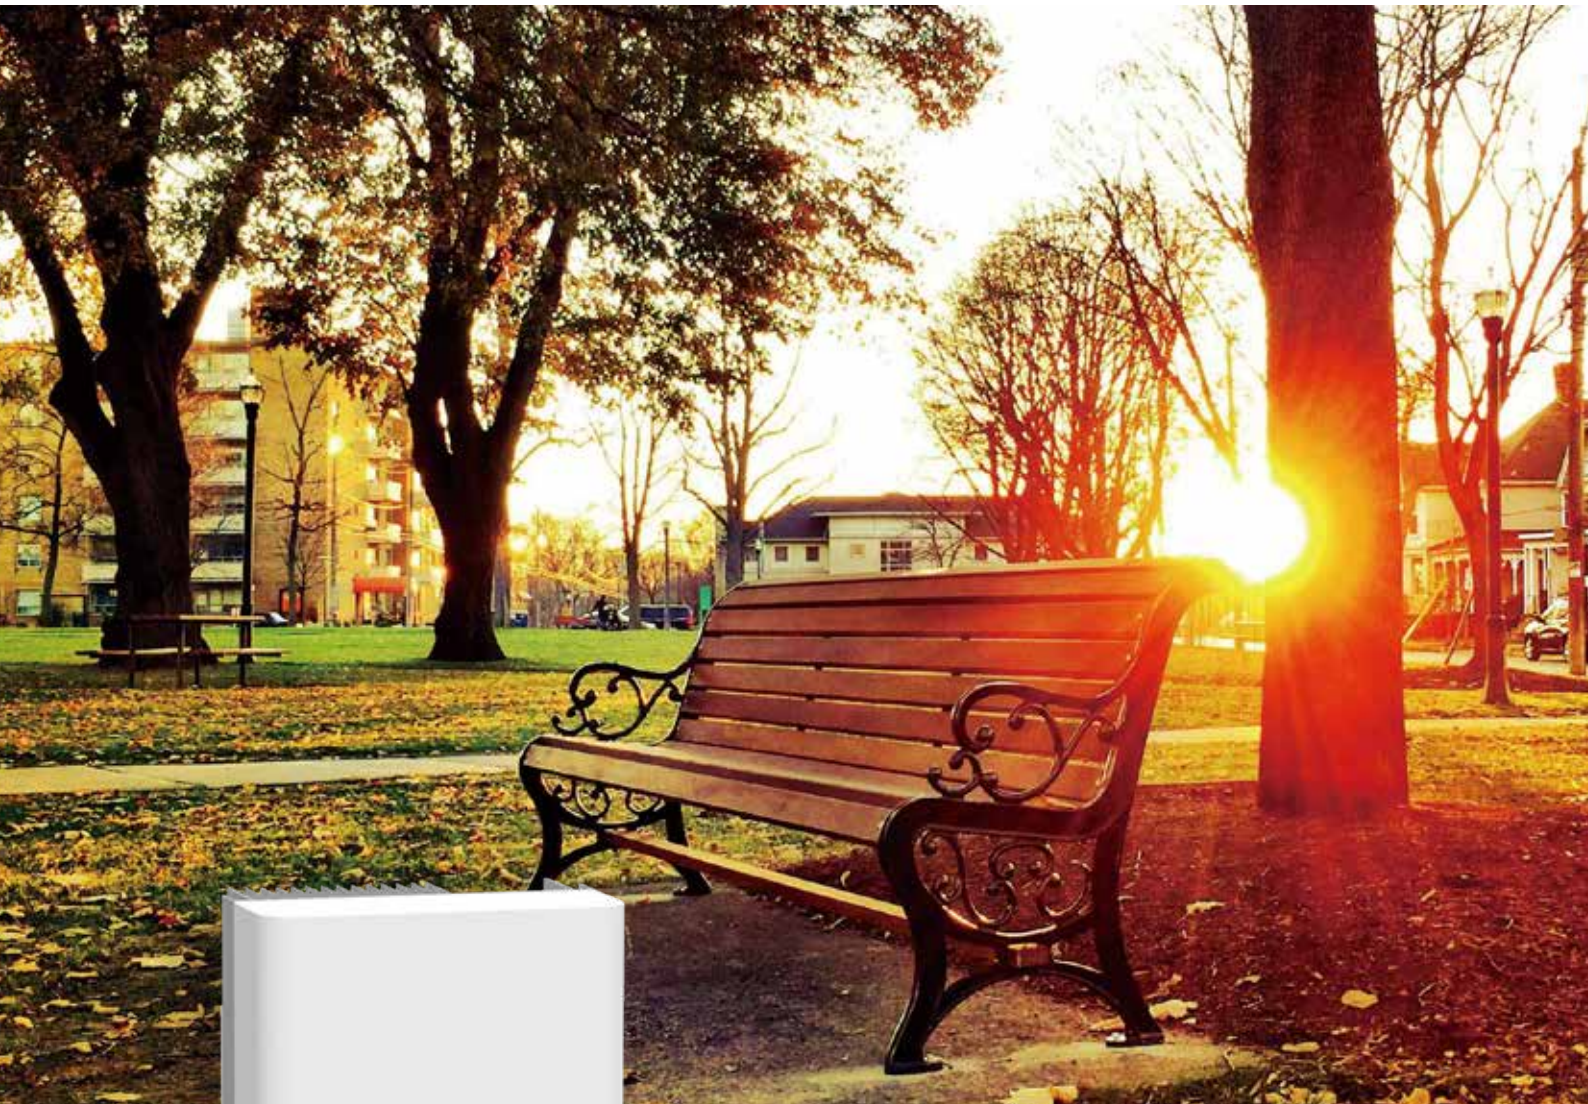

Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Deye

Stock Code: 605117.SH

Model	SUN-18K-G05-AU	SUN-20K-G05-AU	SUN-25K-G05-AU
Input Side			
Max. PV Input Power (kW)	27	30	37.5
Max. PV Input Voltage (V)	1000		
Start-up PV Input Voltage (V)	250		
MPPT Operating Range (V)	200-850		
Max. PV Input Current (A)	39+39		
Max. Short Circuit Current (A)	26+26		
Number of MPPT / Strings per MPPT	2/2+2		
Output Side			
Rated Output Power (kW)	18	20	25
Max. Active Power (kW)	18	20	25
Nominal Output Voltage / Range (V)	3L/N/PE 400V/340V-440V 415V/353V-457V		
Rated Grid Frequency (Hz)	50 / 60 (Optional)		
Operating Phase	Three phase		
Rated AC Grid Output Current (A)	26.1	29	36.2
Max. AC Output Current (A)	26.1	29	36.2
Output Power Factor	0.8 leading to 0.8 lagging		
Total Harmonics Current Distortion (THDi)	<3%		
DC Injection Current (mA)	<0.5%		
Grid Frequency Range	45-55 or 55-65 (Optional)		
Efficiency			
Max. Efficiency	98.5%		
Euro Efficiency	98.0%		
MPPT Efficiency	>99%		
Protection			
DC Reverse-Polarity Protection	Yes		
AC Short Circuit Protection	Yes		
AC Output Overcurrent Protection	Yes		
Output Overvoltage Protection	Yes		
Insulation Resistance Protection	Yes		
Ground Fault Monitoring	Yes		
Anti-islanding Protection	Yes		
Temperature Protection	Yes		
Integrated DC Switch	Yes		
Remote software upload	Yes		
Remote change of operating parameters	Yes		
Surge protection	DC Type II / AC Type II		
General Data			
Size (mm)	362W×527H×220D (Excluding connectors and brackets)		
Weight (kg)	20		
Topology	Transformerless		
Internal Consumption	<1W (Night)		
Running Temperature	-25 to +65		
Ingress Protection	IP65		
Noise Emission (Typical)	≤ 50dB		
Cooling Concept	Smart cooling		
Max. Operating Altitude Without Derating	4000m		
Warranty	10 Years		
Grid Connection Standard	AS/NZS 4777.2		
Operating Surroundings Humidity	0-100%		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
Features			
DC Connection	VP-D4C		
AC Connection	IP65 rated plug		
Display	LCD1602		
Communication Interface	RS485/RS232		
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)		